Schall-Ex® Slide & Lock L-24/20 WS

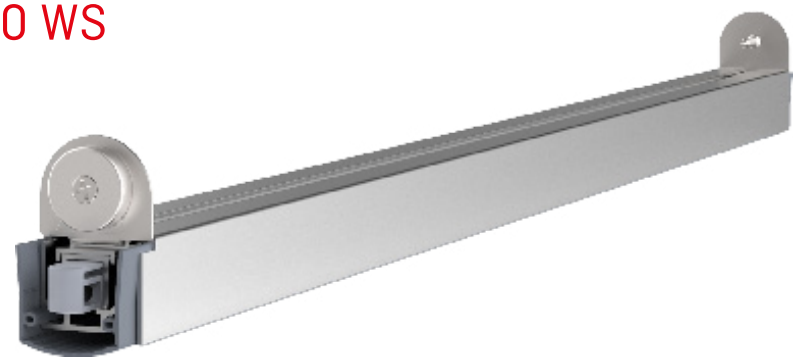

- / sliding door drop seal
- / parallel drop, to minimise friction with the floor
- / no inner rail offset
- / integrated magnet for doors without latch or lock
- / high sound insulation value

APPLICATION

Usability	sound insulation, smoke protection, fire protection, accessibility
Aplication area	interior door
Door leaf material	timber, metal, PVC
Door type	sliding door
Door leaf	single leaf
Opening direction	DIN L or R

TECHNICAL DATA

Carrier material	aluminium
Surface	mill finish
Sealing profile material	self-extinguishing silicone
sealing profile colour	grey
actuator	slide actuator/magnet
actuation	single
clipable actuator	yes
parallel drop	yes

DIMENSIONS

Width	24 mm
Height	20 mm
Travel max.	16 mm
length min.-length max.	485 - 2000 mm
Standard lengths	708 mm, 833 mm, 958 mm, 1083 mm, 1208 mm
Cutback std. lengths	150 mm
Cutback information	min. delivery length cannot be cut back
fixed lengths available	yes

FIXING

Fixing	WS - fixing brackets
installation	in-groove
Accessories incl.	5426
maintenance-free	yes
press plate required	yes

Technische Änderungen vorbehalten / athmer 09.2026
athmer oHG / Sophienhammer / 59757 Arnsberg
T +49 2932 477-500 / info@athmer.com / **athmer.com**

Schall-Ex® Slide & Lock L-24/20 WS

PERFORMANCE AND CERTIFICATION

test cycles	1,000,000
MPA certificate	120005219-20-101 Rev. 01
MPA Qualitylabel	MPA NRW-00708-01 (Vers. 2)
abZ	Z-6.100-2530
accessible	P1B050 DIN CERTCO
EPD	EPD-ATD-36.1

TECHNICAL DRAWING



INSTALLATION DRAWING



ART.NO.

1-965

Technische Änderungen vorbehalten / athmer 09.2026
athmer oHG / Sophienhammer / 59757 Arnsberg
T +49 2932 477-500 / info@athmer.com / **athmer.com**