Schall-Ex® Slide Applic T

- / oak untreated
- / for on-site adjustment to the door surface
- / for sliding doors running in front of the wall

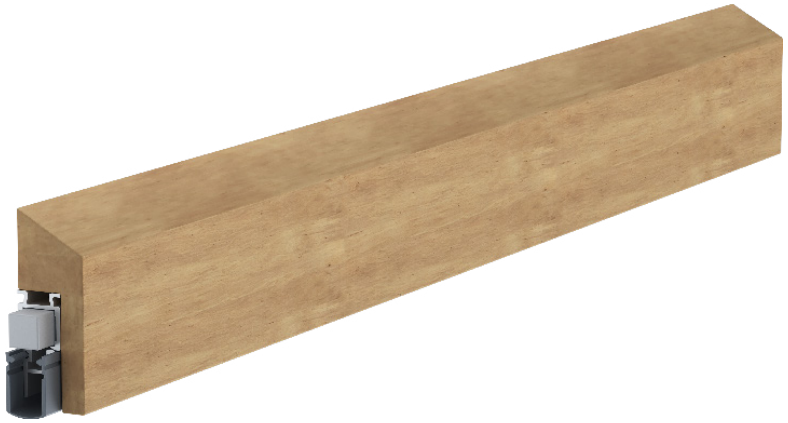

APPLICATION

Usability	sound insulation, smoke protection, fire protection, accessibility
Aplication area	interior door
Door leaf material	timber
Door type	sliding door
Door leaf	single leaf
Opening direction	DIN L or R

TECHNICAL DATA

Carrier material	aluminium
Surface	mill finish
Sealing profile material	self-extinguishing silicone
sealing profile colour	grey
actuator	slide actuator
actuation	single
clipable actuator	yes

DIMENSIONS

Width	21 mm
Height	54 mm
Travel max.	11 mm
length min.-length max.	235 - 1333 mm
Standard lengths	805 mm, 930 mm, 1055 mm
Cutback std. lengths	125 mm
Cutback information	min. delivery length cannot be cut back
fixed lengths available	yes

FIXING

Fixing	FS - surface mounted
installation	screw
Accessories incl.	5129
maintenance-free	yes
press plate required	yes
For retrofitting	yes

Technische Änderungen vorbehalten / athmer 09.2026
athmer oHG / Sophienhammer / 59757 Arnsberg
T +49 2932 477-500 / info@athmer.com / **athmer.com**

Schall-Ex® Slide Applic T

PERFORMANCE AND CERTIFICATION

test cycles	200,000
MPA Qualitylabel	MPA NRW-00708-01 (Vers. 2)
abZ	Z-6.100-2530
accessible	P1B050 DIN CERTCO
EPD	EPD-ATD-36.1

TECHNICAL DRAWING



INSTALLATION DRAWING



ART.NO.	COLOUR
1-718	untreated oak

athmer oHG / Sophienhammer / 59757 Arnsberg
T +49 2932 477-500 / info@athmer.com / **athmer.com**