Schall-Ex® GS-A

- / retrofit hinged glass door drop seal
- / suitable for new and existing doos with min. 6mm glass thickness
- / self-adhesive seal and cover profile
- / easy and quick installation

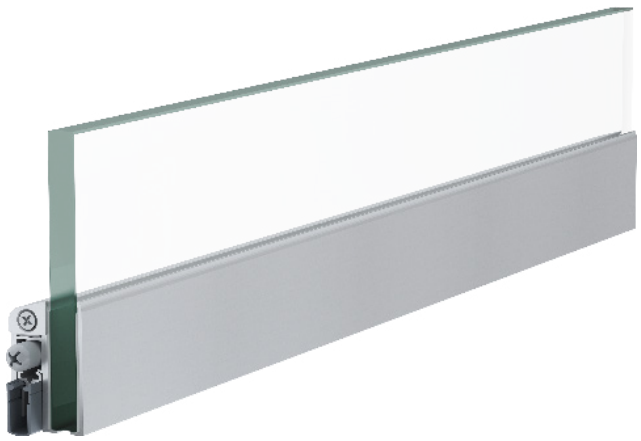

APPLICATION

Usability	sound insulation, accessibility
Aplication area	interior door
Door leaf material	glass
Door type	hinged door
Door leaf	single leaf, double leaf
Opening direction	DIN L or R

TECHNICAL DATA

Carrier material	aluminium
Surface	anodised
Sealing profile material	self-extinguishing silicone
sealing profile colour	grey
actuator	round actuator
actuation	single
clipable actuator	yes
Joint sound insulation	41 dB
Floor gap	7 mm

DIMENSIONS

Width	15.4 mm
Height	45 mm
Travel max.	11 mm
length min.-length max.	235 - 1333 mm
Standard lengths	708 mm, 833 mm, 958 mm, 1083 mm, 1208 mm
Cutback std. lengths	125 mm
Cutback information	min. delivery length cannot be cut back
fixed lengths available	yes

FIXING

Fixing	2-part plug-in profile
installation	adhesive
Accessories incl.	5139
maintenance-free	yes
press plate required	yes
For retrofitting	yes

Technische Änderungen vorbehalten / athmer 09.2026
athmer oHG / Sophienhammer / 59757 Arnsberg
T +49 2932 477-500 / info@athmer.com / **athmer.com**

Schall-Ex® GS-A

PERFORMANCE AND CERTIFICATION

test cycles	1,000,000
MPA certificate	120009355.03 Rev. 02
MPA Qualitylabel	MPA NRW-00708-01 (Vers. 2)
Sound insulation certificates	10-001176 PB 06-K06-04-de-1
accessible	P1B050 DIN CERTO
EPD	EPD-ATD-36.1

TECHNICAL DRAWING



INSTALLATION DRAWING



ART.NO.	COLOUR
1-814	silver anodized (C-0)
1-815	stainless steel anod. (C-31)

athmer oHG / Sophienhammer / 59757 Arnsberg
T +49 2932 477-500 / info@athmer.com / **athmer.com**