Schall-Ex® GSH-8

- for glass doors made of ESG 8 mm glass thickness
- for glass doors sound insulation value up to 32 dB Rw,P
- installation with special adhesive tape, no wet bonding
- parallel lowering without inner rail offset
- clip-on sliding release, no pressure plate required

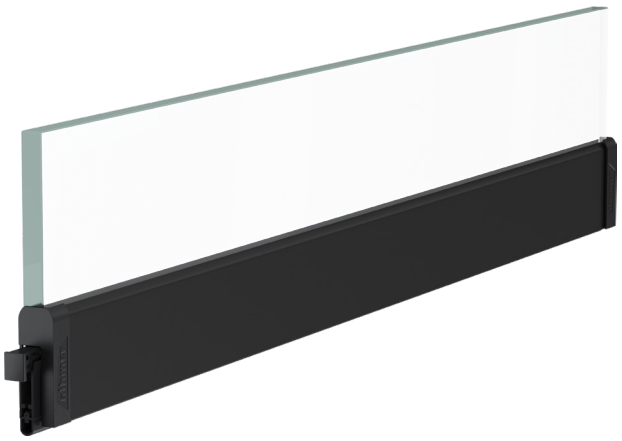

APPLICATION

Usability	sound insulation, smoke protection, accessibility
Aplication area	interior door
Door leaf material	glass
Door type	hinged door
Door leaf	single leaf
Opening direction	DIN L or R

TECHNICAL DATA

Carrier material	aluminium
Surface	anodised
Sealing profile material	self-extinguishing silicone
sealing profile colour	graphitgrau ähnl. RAL 7024
actuator	sliding acutator
actuation	single
clipable actuator	yes
Joint sound insulation	49 dB
Floor gap	7 mm
parallel drop	yes

DIMENSIONS

Width	12.6 mm
Height	40 mm
Travel max.	20 mm
length min.-length max.	235 - 2000 mm
Standard lengths	708 mm, 833 mm, 958 mm, 1,083 mm, 1,208 mm
Cutback std. lengths	125 mm
Cutback information	min. delivery length cannot be cut back
fixed lengths available	yes

FIXING

Fixing	special adhesive tape
installation	adhesive
Accessories incl.	5333
maintenance-free	yes
press plate required	no

Technische Änderungen vorbehalten / athmer 06.2026
athmer oHG / Sophienhammer / 59757 Arnsberg
T +49 2932 477-222 / info@athmer-fingerschutz.com / **athmer.com**

Schall-Ex® GSH-8

PERFORMANCE AND CERTIFICATION

test cycles	1,000,000 cycles
EPD	EPD-ATD-36.1

TECHNICAL DRAWING



INSTALLATION DRAWING

ART.NO.	COLOUR
1-1120	silver anodized (C-0)
1-1121	stainless steel anod. (C-31)
1-1122	black (RAL 9005 matt)
1-1123	anthracite (RAL 7016 matt)
1-1124	special EURAS
1-1125	special RAL

athmer oHG / Sophienhammer / 59757 Arnsberg
T +49 2932 477-222 / info@athmer-fingerschutz.com / **athmer.com**